

11/22/00
JC803 U.S. PTO

LAW OFFICES
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC
2100 PENNSYLVANIA AVENUE, N.W.
WASHINGTON, DC 20037-3213
TELEPHONE (202) 293-7060
FACSIMILE (202) 293-7860
www.sughrue.com

JC715 U.S. PTO
09/717019
11/22/00

November 22, 2000

Alan J. Kasper, Esq.
Direct Dial (202) 663-7903
Email: akasper@sughrue.com

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Application of Kazunori UKIGAWA and Hiroki YAMASHITA
INFORMATION SERVER SYSTEM
Our Ref. Q61928

Dear Sir:

Attached hereto is the application identified above including 48 sheets of the specification and claims, 7 sheets of informal drawings, a copy of the executed Assignment and PTO 1595 form, and a copy of the executed Declaration and Power of Attorney.

The Government filing fee is calculated as follows:


Total claims	28	-	20	=	8	x	\$18.00	=	\$144.00
Independent claims	16	-	3	=	13	x	\$80.00	=	\$1040.00
Base Fee									\$710.00

TOTAL FILING FEE	\$1894.00
Recordation of Assignment	\$40.00
TOTAL FEE	\$1934.00

Checks for the statutory filing fee of \$1894.00 and Assignment recordation fee of \$40.00 are attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16 and 1.17 and any petitions for extension of time under 37 C.F.R. § 1.136 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from November 25, 1999 based on Japanese Application No. 333534/99. The priority document will be filed at a later date.

Respectfully submitted,
SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
Attorneys for Applicant

By: 
Alan J. Kasper
Registration No. 25,426

INFORMATION SERVER SYSTEM

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a system and method for serving information
5 through the Internet.

Description of the Related Art

In recent years, with the development of computer and data communications technologies, those contents to be provided through the Internet have increased in number with enhanced quality and quantity. This results from the heart of Internet, as
10 information serving means for serving information to receivers regardless of the locations of the receivers at any time desired, wherein the entry barrier on the side of information senders is quite low.

The contents (information) to be provided through the Internet are, generally, transmitted in response to a request from a user as a receiver, unlike the cable and
15 wireless television broadcasting which has conventionally been utilized as the information serving means. Of those contents to be provided through the Internet, the commercial contents are frequently updated because of their necessity.

Since the commercial contents to be provided through the Internet need to be transmitted frequently, the following problems arose, as will be explained below.

20 The first problem is that a user utilizing the contents can not easily be aware of the time when the data of the contents to be provided through the Internet are to be updated. Hence, the user accesses the contents when he/she thinks the contents are updated in accordance with information, such as the last updated date and time, etc. as shown by the content provider. However, the user may miss the right time to access the updated
25 content, or the user may repeatedly access the contents which have not been updated for a while, because the contents are not necessarily updated periodically.

The second problem is that an advertiser, who would like to run an advertisement

09747019-112200

(banner) to be provided through the Internet, can not easily determine in which contents the advertisement should be placed. Conventionally, such an advertiser refers to characteristics of users who have accessed the contents so as to determine whether to place the advertisement in the contents. However, the information regarding the number of accesses or characteristics of users having accessed contents may be modified according to the intention of the content provider. Such information is not to represent whether the contents are actually observed. Therefore, such information is not really worth obtaining for the advertiser.

SUMMARY OF THE INVENTION

10 An object of the present invention is to provide a system wherein a user does not miss an appropriate timing when to read updated information to be provided through a network and a user needs not access information which has not been updated yet.

Another object thereof is to provide a system which lets an advertisement provider easily determine whether to put an advertisement in information to be provided through a
15 network.

In order to accomplish the above objects, it is accordingly an object of the present invention to provide an information server system which comprises a server device transmitting information in response to a request, and at least one client device being connected to the server device and sending a request for transmission of information to
20 the server device, wherein:

the server device includes

schedule management means for managing relevance between classifications of information and transmission times of the information,

request receiving means for receiving, from the client device, a request for
25 transmission of information,

request processing means for processing the request received by the request receiving means,

09747019.112200

information providing means for referring to the schedule management means, and for selecting classified information corresponding to a present time, and also for providing the selected information, and

information sending means for sending, through the network, the information
5 provided by the information providing means to a predetermined client device whose request has been processed by the request processing means; and

the at least one client device includes

request sending means for sending a request for transmission of information
to the server device through the network;

10 information receiving means for receiving the information sent from the information sending means through the network; and

information outputting means for outputting the information received by the information receiving means.

In the above-described information server system, transmission times of information
15 to be transmitted are set according to classifications, and the information is provided.

Hence, the user of the client device needs only to send a request for transmission of information at the timing the information of a desired classification is to be transmitted.

In this structure, the user needs not access the server device repeatedly to monitor whether the information is updated.

20 Since information is provided in accordance with transmission times according to the classifications. Hence, it is predictable who to access the information to be provided. This enables an advertiser to easily determined whether to place an advertisement in information provided by the server device. Furthermore, the request processing means calculates the number of processed requests according to the classifications of
25 information, thereby the advertiser can easily determined whether to place an advertisement.

In the above information server system:

09747019-112200

the schedule management means may further manage relevance between information representing areas and time zones of the respective areas;

the request processing means may include area determination means for determining in which area at least one client device having sent a request for transmission of
5 information exists; and

the information providing means may select and provide classified information in accordance with a present time in a time zone of the area which is determined by the request processing means.

According to this structure, even if the time zone of the area where the client device
10 exists differs from the time zone of the area where the server device exists, optimum contents can be provided to the client device in accordance with the time of the area of the client device.

In the above information server system:

the server device may further include schedule information sending means for
15 sending schedule information representing relevance between classifications of information and transmission times of the information to the at least one client device through the network;

the at least one client device may further include
schedule information receiving means for receiving schedule information sent
20 from the schedule information sending means through the network, and

request inputting means for inputting a request for transmission of information from the server device, in accordance with the schedule information received by the schedule information receiving means. In this case,

the request sending means may send a request for transmission of information to the
25 server device based on an input from the request inputting means.

In the above structure, there is provided the request inputting means which can set the time to transmit a request for transmission of information. By doing so, the user of

the client device can obtain information without monitoring whether it is the transmission time in which the information of a desired classification is transmitted. Besides, having set the transmission time, the user does not miss the appropriate timing in which updated information is transmitted.

- 5 In the above information server system may further comprise an intermediate device which has at least one client device thereunder, and is connected to the server device through the network, and intermediates entire data transmissions between the at least one client device and the server device.

In this case the intermediate device may include

- 10 schedule management means for managing schedule information representing substantially same contents as the relevance between the classifications of information and the respective transmission times of the information managed by the schedule management means,

information storage means for storing information provided by the

- 15 information providing means in one of the at least one client device under the intermediate device, and

the request processing means for processing a request, for transmission of information, received from the at least one client device under the intermediate device, and for providing corresponding information to the at least one client device; and

- 20 the request processing means may

refer to the schedule management means so as to determine whether the information requested to be transmitted by the at least one client device is stored in the information storage means,

read out, when determined that the requested information is stored in the

- 25 information storage means, the requested information from the information storage means, and provides the at least one client device with the read information, without sending a request for transmission of the information to the server device through the network, and

send the request, when determined that the request information is not stored in the information storage means, to the server device through the network, and control the information providing means to provide the requested information.

Having thus structured the intermediate device, when the same information is requested to be transmitted from a plurality of client devices under the intermediate device, it is not necessary to repeatedly access the server device for retrieving the same information.

In order to accomplish the above-described objects, according to the second aspect of the present invention, there is provided an information server system which transmits information to at least one client device which has sent through a network a request for transmission of the information, the system comprising:

schedule management means for managing relevance between classifications of information and transmission times of the information;

information providing means for referring the schedule management means, and selecting classified information corresponding to a present time, and also for providing the classified information to the at least one client device; and

information transmission means for transmitting the information selected and provided by the information providing means to the at least one client device, which has sent the request, through the network.

In order to accomplish the above-described objects, according to the third aspect of the present invention, there is provided a method for providing information, in a system comprising a server device and at least one client device connected to the server device through a network, for transmitting information from the server device to the at least one client device through the network in response to a request from the at least one client device, the method comprising the steps of:

managing relevance between classifications of information and transmission times of the information in the server device;

09717019.112200

selecting in the server device classified information corresponding to a present time;

5 device, which has sent a request for transmission of the information, through the network;
and

In order to accomplish the above-described objects, according to the fourth aspect of the present invention, there is provided a method for providing information to at least one

managing relevance between classifications of information and transmission times
e information; and

In order to accomplish the above-described objects, according to the fifth aspect of the present invention, there is provided a server device which is connected to at least one client device through a network, the server device comprising:

request receiving means for receiving a request for transmission of information from at least one client device;

request processing means for processing the request received by the request
 giving means;

25 information providing means for referring to the schedule management means, and
 26 selecting classified information corresponding to a present time, and for providing the
 27 selected information; and

information sending means for sending the information provided by the information providing means to a predetermined client device, through the network, whose request has been processed by the request processing means.

The schedule management means may further manage relevance between
 5 information representing areas and time zones of the respective areas;

the request processing means may include area determination means for determining in which area at least one client device having sent a request for transmission of information exists; and

the information providing means may select and provide classified information
 10 corresponding to a present time in a time zone of the area determined by the area determination means.

The request processing means may further include counting means for counting a number of client devices which have sent a request for transmission of information or a number of client devices to which the information sending means has sent requested
 15 information, according to the classifications of the information.

In order to accomplish the above-described objects, according to the sixth aspect of the present invention, there is provided a server device which is connected to at least one client device through a network, and includes a memory for storing a program and data, a processor for executing the program, and a communications device connected to the
 20 processor and for sending/receiving information to/from the at least one client device, wherein

the server device:

manages relevance between classifications of information and transmission times of the information in the memory;

25 receives in the communications device a request for transmission of the information sent from the at least one client device through the network;

executes, using the processor, the program stored in the memory in response to the

request received by the communications device, and selects classified information corresponding to a present time; and

sends the information selected by the processor from the communications device to the at least one client device, which has sent the request, through the network.

5 In order to accomplish the above-described objects, according to the seventh aspect of the present invention, there is provided a client device connected to a server device through a network, the client device comprising:

request inputting means for inputting a request for transmission of information to be sent from the server device, in accordance with schedule information representing
10 relevance between classifications of information and transmission times of the information;

request sending means for sending a request for transmission of information to the server device through the network based on an input from the request inputting means;

information receiving means for receiving information sent from the server device
15 through the network; and

information outputting means for outputting the information received by the information receiving means.

In the above client device, the request inputting means may include time setting means for setting a transmission time a request for transmission of information is sent to
20 the server device, and input a request to the server device, at the transmission time set by the time setting means.

The request inputting means may:

further include

information classification inputting means for inputting a classification of
25 requested information, and

time determination means for determining whether it is passed a transmission time of the requested information of the classification input by the information

classification inputting means;

control the request sending means to send a request for transmission of information, when the time determination means determines that it is passed the transmission time of the requested information; and

- 5 control the time setting means to set a transmission time in which a request for transmission of information is sent, when the time determination means determines that it is not passed the transmission time of the requested information.

The schedule information is one to be transmitted from the server device through the network.

- 10 In order to accomplish the above objects, according to the eighth aspect of the present invention, there is provided a client device which is connected to a server device through a network, and includes a memory for storing a program and data, a processor for executing the program, an input device and an output device both being connected to the processor, and a communications device for sending/receiving information to/from the
15 server device, wherein the client device:

inputs through the input device a request for information to be sent from the server device, in accordance with schedule information representing relevance between classifications of information and transmission times of the information;

- sends the request input through the input device the communications device to the
20 server device through the network;

receives in the communications device information which is sent from the server device through the network in response to the request; and

outputs the information received by the communications device from the output device.

- 25 In order to accomplish the above objects, according to the ninth aspect of the present invention, there is provided an intermediate device which is connected to a server device through a network and has at least one client device thereunder, the intermediate client

device comprising:

schedule management means for managing schedule information representing substantially same contents as relevance between classifications of information and transmission times of the information managed in the server device;

5 information storage means for storing information provided by the server device in the at least one client device under the intermediate device; and

request processing means for processing a request, for transmission of information, sent from the at least one client device, and for providing the at least one client device with corresponding information, and

10 wherein the request processing means

refers to the schedule management means, and determines whether information requested from the at least one client device is stored in the information storage means,

reads out requested information from the information storage means and
15 provides the at least one client device with the read information, without sending the request to the server device through the network, when determined that the requested information is stored in the information storage means, and

sends the request to the server device through the network, controls the server device to transmit corresponding information, and provides the at least one client device,
20 when determined that requested information is not stored in the information storage means.

In order to accomplish the above objects, according to the tenth aspect of the present invention, there is provided an intermediate device which is connected to a server device through a network, and includes at least one client device thereunder, a memory for
25 storing a program and data, a processor for executing the program, and a communications device connected to the processor and for sending/receiving information to/from the at least one client device, wherein:

002217019.112200

the intermediate device

manages in the memory schedule information representing substantially same contents as relevance between classifications of information and transmission times of the information managed in the server device, and

5 stores in the memory information provided from the server device to the at least one client device; and

the processor

refers, when received a request for transmission of information from the at least one client device, to the schedule information managed in the memory, and

10 determines whether information corresponding to the request is stored in the memory

provides the at least one client device which has sent the request with the information corresponding to the request, without sending the request to the server device through the network, when determined that the requested information is stored in the memory, and

15 sends the request to the server device through the network, controls the server device to transmit information corresponding to the request, and provides the at least one client device with the transmitted information, when determined that the requested information is not stored in the memory.

In order to accomplish the above objects, according to the eleventh aspect of the 20 present invention, there is provided a computer readable recording medium which stores a program which makes a computer device, connected to a plurality of client devices through a network, function as:

schedule management means for managing relevance between classifications of information and transmission times of the information;

25 request receiving means for receiving a request, for transmission of information, sent from one of the plurality of client devices;

request processing means for processing the request received by the request

receiving means;

information providing means for referring to the schedule management means, and for selecting classified information corresponding to a present time, and also for providing the selected information; and

- 5 information sending means for sending the information provided by the information providing means to the one of the plurality of client devices whose request has been processed by the request processing means through the network.

In order to accomplish the above objects, according to the twelfth aspect of the present invention, there is provided a computer readable recording medium which stores a
10 program which makes a computer device, connected to a server device through a network, function as:

request inputting means for inputting a request, for transmission of information, transmitted from the server device on the network, in accordance with schedule information representing relevance between classifications of information and

- 15 transmission times of the information;

request sending means for sending a request for transmission of information to the server device through the network based on an input from the request inputting means;

information receiving means for receiving information sent from the server device through the network; and

- 20 information outputting means for outputting the information received by the information receiving means.

In order to accomplish the above objects, according to the thirteenth aspect of the present invention, there is provided a computer readable recording medium storing a program which makes a computer device, which is connected to a server device through a
25 network and has at least one client device thereunder, function as:

schedule management means for managing schedule information representing substantially same contents as relevance between classifications of information and

transmission times of the information managed by the server device on the network;

information storage means for storing information sent from the server device in the at least one client device; and

request processing means for sending a request, for transmission of information,
5 sent from the at least one client device, to the server device, and

wherein the request processing means

refers to the schedule management means, and determines whether
information requested from the at least one client device is stored in the information
storage means,

10 reads out information corresponding to the request and provides the read
information to the at least one client device, without sending the request to the server
device through the network, when determined that the requested information is stored in
the information storage means, and

sends the request to the server device through the network, and controls the
15 information providing means to transmit the requested information, when determined that
the requested information is not stored in the information storage means.

In order to accomplish the above objects, according to the fourteenth aspect of the
present invention, there is provided a program data signal which is embodied in a carrier
wave and transmitted through a communications path, the signal including segments for
20 making a computer device, which is connected to a plurality of terminal devices through a
network, function as:

incentive providing means for providing a predetermined incentive to at least a part
of the terminal devices which have requested a particular service to be provided;

request frequency counting means for counting a number of terminal devices which
25 have requested a service to be provided; and

incentive modifying means for modifying contents of an incentive provided by the
incentive providing means; in accordance with the number of terminal devices counted by

09717019-112200

the request frequency counting means.

In order to accomplish the above objects, according to the fifteenth aspect of the present invention, there is provided a program data signal which is embodied in a carrier wave and transmitted through a communications path, the signal including segments for
5 making a computer, which is connected to a server device through a network, function as:

request inputting means for inputting a request for transmission of information to be transmitted from the server device on the network, in accordance with schedule information representing relevance between classifications of information and transmission times of the information;

10 request sending means for sending a request, for transmission of information, to the server through the network, based on an input from the request inputting means;

information receiving means for receiving information sent from the server device through the network; and

information outputting means for outputting the information received by the
15 information receiving means.

In order to accomplish the above objects, according to the sixteenth aspect of the present invention, there is provided a program data signal which is embodied in a carrier wave and transmitted through a communications path, the signal including segments for making a computer device, which is connected to a server device through a network on
20 the network and has at least one client device thereunder, function as:

schedule management means for managing schedule information representing substantially same contents as relevance between classifications of information and transmission times of the information managed by the server device on the network;

information storage means for storing information provided from the server device
25 in the at least one client device; and

request processing means for sending a request, for transmission of information, sent from the at least one client device to the server device, and

00221 67027460

wherein the request processing means:

refers to the schedule management means, and determines whether information requested by the at least one client device is stored in the information storage means;

5 reads out the requested information from the information storage means, and provides the read information to the at least one client device, without sending the request to the server device through the network, when determined that the requested information is stored in the information storage means; and

sends the request to the server device through the network, and controls the
10 information providing means to provide the requested information, when determined that the requested information is not stored in the information storage means.

In the above-described inventions, the network is preferably Internet.

BRIEF DESCRIPTION OF THE DRAWINGS

These objects and other objects and advantages of the present invention will become
15 more apparent upon reading of the following detailed description and the accompanying drawings in which:

FIG. 1 is a block diagram showing the structure of an information server system according to an embodiment of the present invention;

FIG. 2A is a diagram showing the structure of a server device shown in FIG. 1;

20 FIG. 2B is a diagram showing the structure of a client device shown in FIG. 1;

FIG. 3 is a diagram exemplifying a schedule list which a content provider shown in FIG. 1 has;

FIGS. 4A and 4B are diagrams each exemplifying a program table provided by a program table provider shown in FIG. 1;

25 FIG. 5 is a flowchart showing a process which is carried out by a client device shown in FIG. 1;

FIG. 6 is a flowchart showing a process which is executed by a server device shown

in FIG. 1;

FIG. 7 is a diagram showing an example of a tame zone table which a request processor of FIG. 1 has;

FIG. 8 is a block diagram showing the structure of an information server system according to another embodiment of the present invention; and

FIG. 9 is a diagram showing the structure of a cache server device of FIG. 8.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will now be explained with reference to the accompanying drawings.

10 FIG. 1 is a block diagram showing the structure of an information server system according to an embodiment of the present invention. As illustrated in FIG. 1, the information server system comprises a server device 1 and a plurality of client devices 2 which are connected to the server device 1 through the Internet 3.

The server device 1 includes those functions of a content storage section 11, a
15 content provider 12, a request processor 13, a program table provider 14 and a communications processor 15. As the hardware for realizing the functions of the sections 11 to 15, the server device 1 includes, as shown in FIG. 2A, a CPU 1A, a memory 1B, a communications device 1C, a disk drive 1D, etc. A program for realizing the functions of the sections 11 to 16 is stored on a disk 1E, and retrieved therefrom.
20 The program is read out by the disk drive 1D, and stored in the memory 1B. Otherwise, this program is embodied in a carrier wave so as to be transmitted from another computer device (any of the client devices 2 or any non-illustrative computer device) through the Internet 3. This program is then received by the communications device 1C, and stored in the memory 1B. The CPU 1A executes the program stored in the memory 1B,
25 thereby to realize the functions of the sections 11 to 16.

The content storage section 11 stores various contents to be provided to any one of the client devices 2 through the Internet 3. A program name is affixed to its

corresponding classification of contents, stored in the content storage section 11, and the contents are identified with their affixed program names.

The content provider 12 selects and retrieves any contents corresponding to a particular program name from the content storage section 11 in accordance the control of the request processor 13, and gives the retrieved contents to the communications processor 15. The contents are addressed to one of the client device 2 which has newly requested the transmission of the contents. The content provider 12 counts the number of requests for the transmission of the contents, in accordance with the control of the request processor 13, according to program names. Every time the contents are updated, the number of requests for the contents may be reset and be counted from an initial value.

In order to facilitate selecting and retrieving the contents from the content storage section 11, the content provider 12 has a schedule list shown in FIG. 3, for example. Each record included in this schedule list includes a program name, the transmission time, and an address in the content storage section 11. When to provide the contents, the content provider 12 refers to this schedule list, and reads out the contents, with a program name corresponding to the present time, at a corresponding address in the content storage section 11.

The request processor 13 processes any request for transmission of the contents or program table sent from the communications processor 15, as will be explained later. The request processor 13 controls the content provider 12 and the program table provider 14 based on the processed result of the request.

The program table provider 14 retrieves a program table stored therein, and gives the retrieved program table to the communications processor 15 in accordance with the control of the request processor 13. Such a program table is addressed to one of the client devices 2 which has requested for the transmission of the program table. The program table will more specifically be described later.

The communications processor 15 receives the request for the transmission of the

002211 6101760

contents or program table, as sent from one client device 2 through the Internet 3, and gives the received request to the request processor 13. The communications processor 15 sends, to the client device 2 through the Internet 3, the contents given by the content provider 12 and the program table given by the program table provider 14.

5 Each of the client devices 2 includes a display section 21, an input section 22, a reservation management section 23 and a communications processor 24. As the hardware for realizing the each of the sections 21 to 24, the client device 2 includes, as illustrated in FIG. 2B, a CPU 2A, a memory 2B, an input device 2C, a display device 2D, a communications device 2E, a disk drive 2F, etc. A program for realizing the functions
10 of the sections 21 to 24 is stored on a disk 2G, read out by the disk drive 2, and stored in the memory 2B. Otherwise, this program is embodied in a carrier wave so as to be transmitted from any other computer device (including the server device 1) through the Internet 3, received by the communications device 2E, and stored in the memory 2B. The CPU 2A executes the program stored in the memory 2B, thereby to realize the
15 functions of the sections 21 to 24.

The display section 21 displays the contents and the program table which are sent respectively by the content provider 12 and the program table provider 14 of the server device 1. The input section 22 inputs a request for transmission of contents and a
20 program table, and gives the request to the communications processor 24. The request is to be sent to the request to the server device 1. The input section 22 inputs reservation setting for transmission of contents, on the basis of the program table displayed on the display section 21.

The reservation management section 23 manages the reservation, for transmission of the contents, which is set based on the program table. The reservation management
25 section 23 monitors whether the current time coincides with the transmission time of the reserved contents. When determined that the current time coincides with the transmission time, the reservation management section 23 sends a request for

transmission of the contents to the server device 1, to the communications processor 24.

The communications processor 24 receives the contents and the program table which are sent from the server device 1 through the Internet 3, and sends the received contents and the program table to the display section 21. The communications processor 5 24 sends, to the server device 1 through the Internet 3, a request for transmission of contents sent from the input section 22 or the reservation management section 23 and/or a request for transmission of the program table sent from the input section 22.

FIGS. 4A and 4B are diagrams each exemplarily showing a program table provided by the program table provider 14. As illustrated in FIG. 4A, this program table includes 10 columns of "Program Name" and "Transmission Time", check boxes of "Reference" and "Update", and radio button type switches (only the appearance of the switches seems like radio button, but a plurality of buttons can possibly be selected) for reservation setting, whereby a check mark appears as the indication of reservation. As illustrated in FIG. 4B, those program names described in the column of "Program Name" are linked elements, 15 which can be activated by being clicked so that the specific data of the contents to be provided as a program(s) can be displayed.

If the contents of a program name are received by the client device 2 and displayed on the display section 21, a check mark appears in a check box which corresponds to the program name. If the contents of the program name are once displayed on the display 20 section 21 and the contents are updated since then, a check mark appears in a check box which corresponds to the program name. The contents are identified according to program names so that a check mark can appropriately appear in its check box, and the contents has update information to which a unique number is affixed every time the contents are updated.

25 The radio button-type switches are used as follows: By manipulation of the input section 22, a user selects a corresponding radio button-type switch for reservation setting and clicks on a button of "Set". By doing so, the reservation setting is registered in the

reservation management section 23. In the reservation setting, a request for contents to be transmitted at the transmission time included in the row of the selected radio button-type switch is sent to the server device 1.

By manipulation of the input section 22, if the user clicks on a button of "Receive", a request for transmission of contents, which the server device 1 provides at that time, is input.

Operations of the information server system according to this embodiment will now be explained, in accordance with the functional block diagram of FIG. 1. Those processes which are respectively carried out by the client device 2 and the server device 1 will now be explained.

FIG. 5 is a flowchart showing the process which is carried out by the client device 2. The client device 2 determines whether a request for transmission of contents or a request for transmission of a program table is input through the input section 22 (Step S11). When determined either request is input, the client device 2 determines whether the request is one for requesting transmission of contents or a one for transmission of a program table (Step S12).

When determined that the request is one for requesting transmission of contents, the flow advances to the procedure of Step S14, as will be explained later. On the contrary, when determined that the request is one for requesting transmission of a program table, the flow advances to the procedure of Step S17, as will be explained later.

When determined neither request is input in Step S11, the reservation management section 23 determines whether the current time coincides with the transmission time of the contents of the reserved program (Step S13). When determined that the current time does not coincide with the transmission time, the flow returns to the procedure of Step S11. On the contrary, when determined that the current time coincides with the transmission time, the flow advances to the procedure of Step S14.

In Step S14, the input section 22 or the reservation management section 23 provides

a request for transmission of contents to the communications processor 24, and then the communications processor 24 sends the provided request to the server device 1 through the Internet 3. The communications processor 24 receives the contents which are sent from the server device 1 through the Internet 3 in accordance with a procedure, as will be explained later (Step S15).

The communications processor 24 provides the display section 21 with the contents sent from the server device 1, and the display section 21 displays the contents (Step S16). After this, the user of the client device 2 can browse the contents provided by the server device 1, and the flow returns back to the procedure of Step S11.

10 In Step S17, the input section 22 provides the communications processor 24 with a request for transmission of a program table. The communications processor 24 sends the provided request to the server device 1 through the Internet 3. Then, the communications processor 24 receives the program table which is sent from the server device 1 through the Internet 3 in accordance with a procedure, as will be explained later 15 (Step S18).

The communications processor 24 gives the display section 21 the program table which has been sent from the server device 3, and the display section 21 displays this program table (Step S19). In the program table displayed on the display section 21, check marks appear in their corresponding check boxes of "Reference" and "Update", 20 based on the program name and update information. By manipulation of the input device 22 in accordance with the program table displayed on the display section 21, the user of the client device 2 inputs a request for transmission of contents or performs reservation setting for transmission of contents (Step S20), and the flow returns to the procedure of Step S11.

25 The client device 2 controls the display section 21 to display the program table, which has been sent before, by manipulation of the input section 22. Having performed this, the inputting of the request for transmission of contents or the reservation setting for

09717019-112200

transmission of contents may be accomplished by manipulation of the input section 22 based on the displayed program table. A command for inputting a request for transmission of contents may be allotted into a particular key of the input section 22.

FIG. 6 is a flowchart showing the process which is carried out by the server device 1.

- 5 In the server device 1, the request processor 13 determines whether the communications processor 15 has received a request for transmission of contents or a request for transmission of a program table (Step S31). When determined that the communications processor 15 has not received any request, the flow returns back to the procedure of Step S31. When determined either request is received by the communications processor 15,
- 10 the request processor 13 further determines which one of the requests the communications processor 15 has received (Step S32).

When determined that the received request is one for requesting transmission of a program table, the program table provider 14 provides the communications processor 15 with a program table, stored in the program table provider 14, which is addressed to one

15 client device 2 which has sent the request for transmission of the program table. The communications processor 15 sends the provided contents to the addressed client device 2 through the Internet 3 (Step S33), and the flow returns to the procedure of Step S31.

When determined that the received request is one for requesting contents, the content provider 12 refers to a schedule list stored therein, and counts the number of

20 requests for contents of a program having a program name whose transmission time coincides with the current time (Step S34).

The content provider 12 further refers to a schedule list stored therein, and obtains an address which is stored in the content storage section 11 and indicates a program whose transmission time corresponds to the current time (Step S35). The content

25 provider 12 reads out, from the content storage section 11, the contents with a program name whose transmission time coincides with the current time, in accordance with the obtained address (Step S36).

The content provider 12 provides the communications processor 15 with the contents, read out in Step S36, which are addressed to the client device which has sent the request for transmission of contents under the control of the request processor 13. The communications processor 15 sends the provided contents to the addressed client device 2 5 through the Internet 3 (Step S37), and the flow returns to the procedure of Step S31.

Then, in the information server system according to this embodiment, the process, wherein the client device 2 receives the contents sent from the server device 1 and controls the display section 21 to display the received contents, will now be explained with the following two examples.

10 Example 1

In this example, explanations will be made to the case where the client device 2 obtains a program table and receives the contents sent from the server device 1 at that time the client device 1 obtains the program table.

The user of the client device 2 inputs a request for transmission of a program table 15 by predetermined manipulation of the input section 22. This request is sent to the server device 1 from the communications processor 24 through the Internet 3 and received by the communications processor 15 of the server device 1. The communications processor 15 provides the request processor 13 with this request. The request processor 13 determines that this request is one for requesting transmission of a program table, and 20 assigns the request to the program table provider 14. The program table provider 14 sends the program table stored therein. The communications processor 15 sends the program table to the client device 2, which has requested the program table, through the Internet 3.

The communications processor 24 of the client device 2 receives the program table 25 thus sent from the server device 1, and gives the received program table to the display section 21. The display section 21 then displays the program table. The user of the client device 2 clicks on the button of "Receive" on the displayed program table, by

manipulation of the input section 22.

Upon this, the request for transmission of contents is sent to the server device 1 through the input section 22, the communications processor 24 and the Internet 3. This request is received by the communications processor 15 of the server device 1. The communications processor 15 gives this request to the request processor 13, and the request processor 13 determines that the request is one for requesting transmission of contents, thereby assigning the request to the content provider 12.

The content provider 12 refers to the schedule list stored therein, and obtains an address, in the content storage section 11, of a program whose transmission time corresponds to the current time. The content provider 12 reads out the contents at the obtained address from the content storage section 11, and sends the contents to the client device 2 which has requested the contents from the communications processor 15 through the Internet 3.

The communications processor 24 of the client device 2 receives the contents which are thus sent from the server device 1, and gives the received contents to the display section 21. The display section 21 displays the contents thereon. Then, the user of the client device 2 can browse the contents which are provided from the server device 1 in real time.

Example 2

In this example, explanations will be made to the case where the client device 2 receives contents from the server device 1 right at the time which has been set as the transmission time. Note that the process, wherein the client device 2 obtains the program table from the server device 1 and controls the display section 21 to display the obtained program table, is the same as that described in Example 1.

The user of the client device 2 selects a radio button-type switch corresponding to the contents of a desired program name, by manipulation of the input section 22 in the state where the program table is displayed on the display section 21. Further, the user

clicks on the button of "Set" on the display table, by manipulation of the input section 22, thereby to complete the reservation setting. The reservation thus set by the user is managed by the reservation management section 23, and the reservation management section 23 continuously monitors whether the transmission time of contents is to coincide
5 with the set time.

When the reservation management section 23 determines that the transmission time of contents is to coincide with the set time, a request for transmission of contents is sent to the server device 1 from the reservation management section 23 through the communications processor 24 and the Internet 3. The communications processor 15 of
10 the server device 1 receives this request. Note that the procedure, wherein the communications processor 15 of the server device 1 receives the information for requesting transmission of contents, and the procedures following the above procedure are the same as those described in Example 1.

As explained above, in the information server system according to this embodiment,
15 the transmission times in which the contents are transmitted from the server device 1 are set according to their program names. According to the structure of the system, the user of the client device 2 needs just to send a request for transmission of desired contents the contents are to be transmitted in accordance with the obtained program table. Hence, the user does not need to perform an unnecessary operation for frequently accessing the
20 contents.

The time the desired contents are to be transmitted can be set based on the program table sent from the server device 1. Even if the user of the client device 2 does not monitor whether the current time coincides with the transmission time, the desired contents can be obtained. Besides, having set the reservation, the user of the client
25 device 2 does not miss the timing the updated contents are transmitted.

A program table includes check boxes of "Reference" and "Update". Thus, the user of the client device 2 can easily determine whether the user has viewed the contents

of each program and, further, whether the user has viewed the contents after being updated. Hence, the user of the client device 2 can receive and view contents sent from the server device 1, without missing the right timing the contents to be updated are transmitted.

5 Each of the program names included in the program table is a linked element through which the user of the client device 2 can obtain the specific information about each program. The user of the client device 2 clicks on a program name on the program table displayed on the display section 21, by manipulation of the input section 22, thereby to acquire the specific contents. According to this structure, the user of the client device
10 2 can easily determine whether to access a particular program.

Because the transmission times of the contents from the server device 1 are set according to programs, it is predictable who (e.g., any of those who may use the contents for business sake or for their own interests) to access the contents. Thus, an advertisement provider can easily determine whether to provide an advertisement in the
15 contents of each program.

The content provider 12 counts the number of requests for transmission of contents, and sums up the number for each program name. By doing so, data showing the access frequency how many times the contents of a particular program are viewed. Therefore, the advertisement provider can easily determine in which program an advertisement
20 should be provided in the contents.

After obtained the time to transmit the contents, i.e., having set the contents into a program and transmitted the contents to the client device 2 from the server device 1 through the Internet 3, in a case where contents including motion pictures possibly in real time are employed, the user of the client device 2 can have the feeling of obtaining the
25 desired information in real time.

In the above-described embodiment, the content provider 12 selects and provides contents which are created in advance and stored in the content storage section 11, based

on the schedule list. However, it is not necessary that those contents which the content provider 12 selects and provides are created in advance and may be motion pictures which are photographed in real time, for example.

The content storage section 11 may store URLs (Uniform Resource Locators) specifying the location of desired contents, instead of storing the contents themselves. In this case, the content provider 12 may read out a particular URL from the content storage section 11, and obtain the contents from another server on the Internet 3 based on the read URL, so as to send the obtained contents to the client device 2.

In the above-described embodiment, only when a request for transmission of contents is sent from the client device 2, the content provider 12 provides the contents addressed to the client device 2 which has sent the request. In addition, the content provider 12 may also provide the contents to any of the client devices 2, which is still connected to the server device since the connection has been made between the client device 2 and the server device 1.

In the above-described embodiment, the content provider 12 refers to the schedule list when the procedure is carried out under the control of the request processor 13, and sums up the number of requests for transmission of contents for every program name. However, the content provider 12 may sum up the number of client devices 2 to which the content provider 12 have provided the contents, for every program name.

In the above-described embodiment, the program table includes the columns of "Program Name" and "Transmission Time" and, check boxes of "Refer" and "Update" and radio button-type switches for the reservation setting. However, the format of the program table is not limited to this. For example, a predetermined icon may be included right next to the program name whose contents are updated/not updated. According to this structure, the user of the client device 2 can be aware of whether the contents of each program name are updated. Further, if the contents are updated every time transmitted, there is no need to include in the program table any information showing whether or not

the contents are updated.

In the above-described embodiment, having selected a particular radio button-type switch in the program table, a request for transmission of contents with a program name corresponding to the switch is sent, thereby to accomplish the reservation setting.

5 However, the method for setting the reservation is not limited to this. For example, the user of the client device 2 may perform the reservation setting by manipulation of a predetermined key(s) of the input section 22.

In the above-described embodiment, the client device 2 obtains a program table, by inputting a request for the program table so as to control the server device 1 to send the
10 table thereto. However, the method for obtaining the program table is not limited to this. For example, regardless of the request, the server device 1 may send an e-mail including a program table and being addressed to a pre-registered address. Otherwise, the server device 1 may provide the program table in response to a request from any other server device on the Internet 3, or utilize a BBS (Bulletin Board System) which allows user to
15 receive the program table. Furthermore, the program table may be stored in a recording medium, such as CD-ROM, etc., and sent to the user of the client device 2. As long as the program table is not used for the reservation setting in its format, the table may be printed on paper magazines and read by the user of the client device 2.

In the above-described embodiment, the content provider 11 of the server device 1 is
20 to provide the client device 2 with the contents if its transmission time coincides with the current time. However, the contents may possibly be provided to the client device 2 from the server device 1 as needed, if the current time has passed its transmission time.

In the system having such a structure, when inputting a request for transmission of the contents through the input section 22, the information (in this case, program name,
25 transmission time, etc.) about the contents may be input at the same time. At this time, the client device 2 sends the information about the contents together with the request for transmission of the contents to the server device 1.

In the server device 1, the request processor 13 provides the content provider 12 with the information about the contents. Then, the content provider 12 reads out the contents from the content storage section 11 in accordance with the information, from the request process 13, and provides the client device 2 with the read contents through the communications processor 24 and the Internet 3.

In each of the client devices 2, there may be provided means for determining whether contents of a particular program have already been sent from the server device 1, i.e., whether the current time has passed the transmission start time of the contents, in accordance with input information about the contents and a program table received in advance. When determined that the contents have already been provided, a request input through the input section 22 and the information about the contents are sent to the sever device 1. On the contrary, when determined that the contents have not been provided, the CPU of the client device 2 may control the reservation management section 23 to perform reservation setting for transmission of the corresponding contents.

In the above-described embodiment, the explanations have been made to the system under the assumption that the server device 1 and the client device 2 are in the same time zone. However, a user can connect to the Internet 3 anywhere all over the world regardless of the country, area, etc. of the user. Hence, if the client device 2 is in an area where there is a difference in time between the area and an area of the server device 1, for example, if the client device 2 is in Japan where it's the daytime, the server device 1 is somewhere in U.S. where it's the night time. In such a case, the contents of each program can not be provided at a desired time.

The server device 1 may provide the client device 2 with the contents of each program under the consideration of the area of the client device 2. In order to do this, in the server device 1, the request processor 13 can contain a time-zone table which is shown in FIG. 7, for example. As illustrated in FIG. 7, the time-zone table stores information regarding areas all over the world, and their time differences with respect to

the area where the server device 1 exists, in a manner corresponding with each other.

The above-described procedure of Step S35 in FIG. 6 is changed as follows: The request processor 13 determines in which area the client device 2 which has sent the request to the server device 1 is located. If there is a time difference between the area of the client device 2 and the area of the server device 1, the present time clocked in the server device 1 is adjusted in accordance with the time difference. With reference to the schedule list stored in the server device 1, the request processor 13 obtains an address corresponding to the adjusted present time from the content storage section 11.

When the request processor 13 determines in which area the client device 2 is located, it may refer to the location of an access point of the client device 2 for connecting to the Internet 3, for example. The request processor 13 may also refer to a country code (for example, the country code may be "jp", if the country of the client device 2 is Japan) representing a country name included in the address of the client device 2.

Having thus formed the structure, even when the client device 2 is located in any area all over the world, the appropriate contents are provided from the server device 1 in accordance with the time of the area. The management of the time zones is achieved in the server device 1, thus only one program table to be provided to the client device 2 is necessary.

In the above-described embodiment, it has been assumed that the client device 2 is directly connected to the Internet 3. However, there is any other client device(s) which is connected to the Internet through a LAN (Local Area Network). In such a case, what is so-called a cache server device is arranged at the entrance of the Internet from a LAN, a network system in which the cache server device intermediates data transmission between the server device and the client device which is under the server device.

FIG. 8 is a block diagram showing the structure of the network system having such a cache server device. As illustrated in FIG. 8, the cache server device 4 includes a request processor 41, a content storage section 42, a program table management section

43, a communications processor 44, and a LAN controller 45. As the hardware for realizing the functions of the sections 41 to 45, the cache server device 4 includes a CPU 4A, a memory 4B, a disk drive 4C, a communications device 4D, and a LAN adapter 4E, etc. The program for realizing the functions of the sections 41 to 45 is stored in a disk 5 4F, and read out by the disk drive 4C so as to be stored in the memory 2B. Otherwise, this program is embodied in a carrier wave, and transmitted from another computer device (server device 1) through the Internet 3. Further, the program is received by the communications device 4D, and stored in the memory 4B. The CPU 4A executes the program stored in the memory 4B, thereby to realize the functions of the sections 41 to 10 45.

The structures of the server device 1 and client device 2 shown in FIG. 8 are substantially the same as those included in the system described in FIG. 1. However, the communications processor 24 of the client device 2 is one for performing communications through a LAN 5. Particularly, the communications device 2E includes 15 a LAN card or the like. In the cache server device 4, the communications processor 44 is connected to the server device 1 through the Internet 3. The LAN controller 45 is connected to a plurality of terminal devices 2 through the LAN 5.

Operations of this system will now be described, in accordance with the functional block diagram shown in FIG. 8. In the client device 2, once a request for transmission 20 of contents or a request for transmission of a program table is input, the request is provided to the request processor 41 through the LAN 5 and the LAN controller 45. The request processor 41 determines what kind of request, i.e. whether to request a program table or contents of a program, the received request is.

In the case where the request is one for requesting transmission of a program table, 25 the request processor 41 controls the communications processor 44 to send the request to the server device 1 through the Internet 3. The communications processor 44 controls the LAN controller 45 to send the program table, sent from the server device 1 through

the Internet 3, to the client device 2 having sent the request for the program table, through the LAN 5. At the same time, the communications processor 44 provides the program table management section 43 with the sent program table. Then, the program table management table 43 manages the most-recently updated program table at any time.

5 On the contrary, in the case where the request is one for requesting transmission of contents, the request processor 41 refers to the program table managed by the program table management section 43. Further, the request processor 41 determines whether the contents which have been sent from the server device 1 at the present moment have already been stored in the content storage section 42, as will be explained later.

10 When determined that the contents have already been stored therein, the request processor 41 controls the content storage section 42 to provide the LAN controller 45 with the contents corresponding to the request, i.e. the same contents as those having been transmitted from the server device 1 at the present moment.

When determined that the contents have not been stored, the request processor 41
15 controls the communications processor 44 to provide the server device 1 through the Internet 3 with a request for transmission of contents. The communications processor 44 controls the LAN controller 45 to provide through the LAN 5 the client device 2, having sent the request, with the contents sent from the server device 1 through the Internet 3. At the same, the communications processor 44 stores the sent contents in the content
20 storage section 42. Thereafter, for any request for the same contents, those stored in the content storage section 42 are sent to any of the client device 2. Hence, the cache server device 4 needs not repeatedly access the server device 1, when retrieving the same information.

In the above-described embodiments, the explanations have been made to the
25 system, wherein the server device 1 and the client device 2 are connected with each other through the Internet 3. However, the present invention may be adapted to the system, wherein a server device and at least one client device are connected through a closed-

commercial network. In addition, the present invention may be adapted to the system, wherein at least one cellular phone is employed as a terminal device to which various information are sent through a base station.

Various embodiments and changes may be made thereonto without departing from
5 the broad spirit and scope of the invention. The above-described embodiments are intended to illustrate the present invention, not to limit the scope of the present invention. The scope of the present invention is shown by the attached claims rather than the embodiments. Various modifications made within the meaning of an equivalent of the claims of the invention and within the claims are to be regarded to be in the scope of the
10 present invention.

This application is based on Japanese Patent Application No. H11-333534 filed on November 25, 1999, and including specification, claims, drawings and summary. The disclosure of the above Japanese Patent Application is incorporated herein by reference in its entirety.

002277 51027260

What is claimed is:

1. An information server system which comprises a server device transmitting information in response to a request, and at least one client device being connected to said server device and sending a request for transmission of information to said server device,
5 wherein:
said server device includes
schedule management means for managing relevance between classifications of information and transmission times of the information,
request receiving means for receiving, from said client device, a request for
10 transmission of information,
request processing means for processing the request received by said request receiving means,
information providing means for referring to said schedule management means, and for selecting classified information corresponding to a present time, and also
15 for providing the selected information, and
information sending means for sending, through the network, the information provided by said information providing means to a predetermined client device whose request has been processed by said request processing means; and
said at least one client device includes
20 request sending means for sending a request for transmission of information to said server device through the network;
information receiving means for receiving the information sent from said information sending means through the network; and
information outputting means for outputting the information received by said
25 information receiving means.
2. The information server system according to claim 1, wherein:
said schedule management means further manages relevance between information

002211 67019 442200

representing areas and time zones of the respective areas;

said request processing means includes area determination means for determining in which area at least one client device having sent a request for transmission of information exists; and

5 said information providing means selects and provides classified information in accordance with a present time in a time zone of the area which is determined by said request processing means.

3. The information server system according to claim 1, wherein:

10 said server device further includes schedule information sending means for sending schedule information representing relevance between classifications of information and transmission times of the information to said at least one client device through the network;

said at least one client device further includes

15 schedule information receiving means for receiving schedule information sent from said schedule information sending means through the network, and

request inputting means for inputting a request for transmission of information from said server device, in accordance with the schedule information received by said schedule information receiving means; and

20 said request sending means for sending a request for transmission of information to said server device based on an input from said request inputting means.

4. The information server system according to claim 1, further comprising an intermediate device which has at least one client device thereunder, and is connected to said server device through the network, and intermediates entire data transmissions between said at least one client device and said server device, and wherein:

25 said intermediate device includes

schedule management means for managing schedule information representing substantially same contents as the relevance between the classifications of information

09747019 112200

and the respective transmission times of the information managed by said schedule management means,

information storage means for storing information provided by said information providing means in one of said at least one client device under said
5 intermediate device, and

said request processing means for processing a request, for transmission of information, received from said at least one client device under said intermediate device, and for providing corresponding information to said at least one client device; and

said request processing means
10 refers to said schedule management means so as to determine whether the information requested to be transmitted by said at least one client device is stored in said information storage means,

reads out, when determined that the requested information is stored in said information storage means, the requested information from said information storage
15 means, and provides said at least one client device with the read information, without sending a request for transmission of the information to said server device through the network, and

sends the request, when determined that the request information is not stored in said information storage means, to said server device through the network, and controls
20 said information providing means to provide the requested information.

5. The information server system according to claim 1, wherein the network is Internet.

6. An information server system which transmits information to at least one client device which has sent through a network a request for transmission of the
25 information, said system comprising:

schedule management means for managing relevance between classifications of information and transmission times of the information;

information providing means for referring said schedule management means, and selecting classified information corresponding to a present time, and also for providing the classified information to said at least one client device; and

information transmission means for transmitting the information selected and
5 provided by said information providing means to said at least one client device, which has sent the request, through the network.

7. A method for providing information, in a system comprising a server device and at least one client device connected to said server device through a network, for transmitting information from said server device to said at least one client device through
10 the network in response to a request from said at least one client device, said method comprising the steps of:

managing relevance between classifications of information and transmission times of the information in said server device;

sending a request for transmission of information through the network from said at
15 least one client device to said server device;

selecting in said server device classified information corresponding to a present time;

transmitting the selected information from said server device to said at least one client device, which has sent a request for transmission of the information, through the
20 network; and

outputting the transmitted information from said at least one client device.

8. A method for providing information to at least one client device which has requested transmission of the information; said method comprising the step of:

managing relevance between classifications of information and transmission times
25 of the information; and

sending classified information corresponding to a present time to an information provider through the network.

9. A server device which is connected to at least one client device through a network, said server device comprising:

schedule management means for managing relevance between classifications of information and transmission times of the information;

5 request receiving means for receiving a request for transmission of information from said at least one client device;

request processing means for processing the request received by said request receiving means;

information providing means for referring to said schedule management means, and
10 selecting classified information corresponding to a present time, and for providing the selected information; and

information sending means for sending the information provided by said information providing means to a predetermined client device, through the network, whose request has been processed by said request processing means.

15 10. The server device according to claim 9, wherein:

said schedule management means further manages relevance between information representing areas and time zones of the respective areas;

said request processing means includes area determination means for determining in which area at least one client device having sent a request for transmission of information
20 exists; and

said information providing means selects and provides classified information corresponding to a present time in a time zone of the area determined by said area determination means.

11. The server device according to claim 9, wherein said request processing
25 means further includes counting means for counting a number of client devices which have sent a request for transmission of information or a number of client devices to which said information sending means has sent requested information, according to the

classifications of the information.

12. The server device according to claim 9, wherein the network is Internet.

13. A server device which is connected to at least one client device through a network, and includes a memory for storing a program and data, a processor for executing
5 the program, and a communications device connected to said processor and for sending/receiving information to/from said at least one client device, wherein
said server device:

manages relevance between classifications of information and transmission times of the information in said memory;

10 receives in said communications device a request for transmission of the information sent from said at least one client device through the network;

executes, using said processor, the program stored in said memory in response to the request received by said communications device, and selects classified information corresponding to a present time; and

15 sends the information selected by said processor from said communications device to said at least one client device, which has sent the request, through the network.

14. A client device connected to a server device through a network, said client device comprising:

request inputting means for inputting a request for transmission of information to be
20 sent from said server device, in accordance with schedule information representing relevance between classifications of information and transmission times of the information;

request sending means for sending a request for transmission of information to said server device through the network based on an input from said request inputting means;

25 information receiving means for receiving information sent from said server device through the network; and

information outputting means for outputting the information received by said

09747019.112200

information receiving means.

15. The client device according to claim 14, wherein said request inputting means includes time setting means for setting a transmission time a request for transmission of information is sent to said server device, and inputs a request to said server device, at the
5 transmission time set by said time setting means.

16. The client device according to claim 15, wherein said request inputting means:

further includes

information classification inputting means for inputting a classification of
10 requested information, and
time determination means for determining whether it is passed a transmission time of the requested information of the classification input by said information classification inputting means;

controls said request sending means to send a request for transmission of
15 information, when said time determination means determines that it is passed the transmission time of the requested information; and

controls said time setting means to set a transmission time in which a request for transmission of information is sent, when said time determination means determines that it is not passed the transmission time of the requested information.

20 17. The client device according to claim 14, wherein the schedule information is one to be transmitted from said server device through the network.

18. The client device according to claim 14, wherein the network is Internet.

19. A client device which is connected to a server device through a network, and includes a memory for storing a program and data, a processor for executing the program,
25 an input device and an output device both being connected to said processor, and a communications device for sending/receiving information to/from said server device, wherein said client device:

09717019.112200

inputs through said input device a request for information to be sent from said server device, in accordance with schedule information representing relevance between classifications of information and transmission times of the information;

sends the request input through said input device said communications device to
5 said server device through the network;

receives in said communications device information which is sent from said server device through the network in response to the request; and

outputs the information received by said communications device from said output device.

10 20. An intermediate device which is connected to a server device through a network and has at least one client device thereunder, said intermediate device comprising:

schedule management means for managing schedule information representing substantially same contents as relevance between classifications of information and

15 transmission times of the information managed in said server device;

information storage means for storing information provided by said server device in said at least one client device under said intermediate device; and

request processing means for processing a request, for transmission of information, sent from said at least one client device, and for providing said at least one client device

20 with corresponding information, and

wherein said request processing means

refers to said schedule management means, and determines whether information requested from said at least one client device is stored in said information storage means,

25 reads out requested information from said information storage means and provides said at least one client device with the read information, without sending the request to said server device through the network, when determined that the requested

information is stored in said information storage means, and

sends the request to said server device through the network, controls said server device to transmit corresponding information, and provides said at least one client device, when determined that requested information is not stored in said information
5 storage means.

21. The intermediate device according to claim 20, wherein the network is Internet.

22. An intermediate device which is connected to a server device through a network, and includes at least one client device thereunder, a memory for storing a
10 program and data, a processor for executing the program, and a communications device connected to said processor and for sending/receiving information to/from said at least one client device, wherein:

said intermediate device

manages in said memory schedule information representing substantially
15 same contents as relevance between classifications of information and transmission times of the information managed in said server device, and

stores in said memory information provided from said server device to said at least one client device; and

said processor

20 refers, when received a request for transmission of information from said at least one client device, to said schedule information managed in said memory, and determines whether information corresponding to the request is stored in said memory

provides said at least one client device which has sent the request with the information corresponding to the request, without sending the request to said server
25 device through the network, when determined that the requested information is stored in said memory, and

sends the request to said server device through the network, controls said

server device to transmit information corresponding to the request, and provides said at least one client device with the transmitted information, when determined that the requested information is not stored in said memory.

23. A computer readable recording medium which stores a program which makes
5 a computer device, connected to a plurality of client devices through a network, function as:

schedule management means for managing relevance between classifications of information and transmission times of the information;

request receiving means for receiving a request, for transmission of information,
10 sent from one of said plurality of client devices;

request processing means for processing the request received by said request receiving means;

information providing means for referring to said schedule management means, and for selecting classified information corresponding to a present time, and also for
15 providing the selected information; and

information sending means for sending the information provided by said information providing means to the one of said plurality of client devices whose request has been processed by said request processing means through the network.

24. A computer readable recording medium which stores a program which makes
20 a computer device, connected to a server device through a network, function as:

request inputting means for inputting a request, for transmission of information, transmitted from said server device on the network, in accordance with schedule information representing relevance between classifications of information and transmission times of the information;

25 request sending means for sending a request for transmission of information to said server device through the network based on an input from said request inputting means;

information receiving means for receiving information sent from said server device

through the network; and

information outputting means for outputting the information received by said information receiving means.

25. A computer readable recording medium storing a program which makes a computer device, which is connected to a server device through a network and has at least one client device thereunder, function as:

schedule management means for managing schedule information representing substantially same contents as relevance between classifications of information and transmission times of the information managed by said server device on the network;

10 information storage means for storing information sent from said server device in said at least one client device; and

request processing means for sending a request, for transmission of information, sent from said at least one client device, to said server device, and

wherein said request processing means

15 refers to the schedule management means, and determines whether information requested from said at least one client device is stored in said information storage means,

reads out information corresponding to the request and provides the read information to said at least one client device, without sending the request to said server device through the network, when determined that the requested information is stored in 20 said information storage means, and

sends the request to said server device through the network, and controls said information providing means to transmit the requested information, when determined that the requested information is not stored in said information storage means.

25 26. A program data signal which is embodied in a carrier wave and transmitted through a communications path, said signal including segments for making a computer device, which is connected to a plurality of terminal devices through a network, function

09717019.112200

as:

incentive providing means for providing a predetermined incentive to at least a part of the terminal devices which have requested a particular service to be provided;

request frequency counting means for counting a number of terminal devices which
5 have requested a service to be provided; and

incentive modifying means for modifying contents of an incentive provided by said incentive providing means, in accordance with the number of terminal devices counted by said request frequency counting means.

27. A program data signal which is embodied in a carrier wave and transmitted
10 through a communications path, said signal including segments for making a computer, which is connected to a server device through a network, function as:

request inputting means for inputting a request for transmission of information to be transmitted from said server device on the network, in accordance with schedule information representing relevance between classifications of information and
15 transmission times of the information;

request sending means for sending a request, for transmission of information, to said server through the network, based on an input from said request inputting means;

information receiving means for receiving information sent from said server device through the network; and

20 information outputting means for outputting the information received by said information receiving means.

28. A program data signal which is embodied in a carrier wave and transmitted through a communications path, said signal including segments for making a computer device, which is connected to a server device through a network on the network and has at
25 least one client device thereunder, function as:

schedule management means for managing schedule information representing substantially same contents as relevance between classifications of information and

information storage means for storing information provided from said server device in said at least one client device; and

wherein said request processing means:

reads out the requested information from said information storage means, and provides the read information to said at least one client device, without sending the request to said server device through the network, when determined that the requested information is stored in said information storage means; and

sends the request to said server device through the network, and controls said
15 information providing means to provide the requested information, when determined that
the requested information is not stored in said information storage means.

ABSTRACT OF THE DISCLOSURE

A server device, which has a content storage section, a content provider, a program table provider, a request processor and the like and can be accessed by a plurality of client devices, is arranged on the Internet. The content provider has a list, in which

5 information about contents with relevance to their transmission times are registered.


The content provider reads out the contents from the content storage section based on the list. The request processor controls the content provider to sent the read contents to a client device which has sent a request for transmission of the contents. The program table provider provides the client device, whose request is processed by the request

10 processor, with a program table storing classifications of contents with relevance to their corresponding transmission times. This program table includes information for setting reservation for transmission of contents. The client device, which has received the program table, inputs a request for transmission of contents in accordance with the program table, makes the server device to send the contents to the client device, and

15 makes the server device to send the contents at a time which is reserved and set as transmission time in accordance with the program table.

09717019 112200

FIG. 1

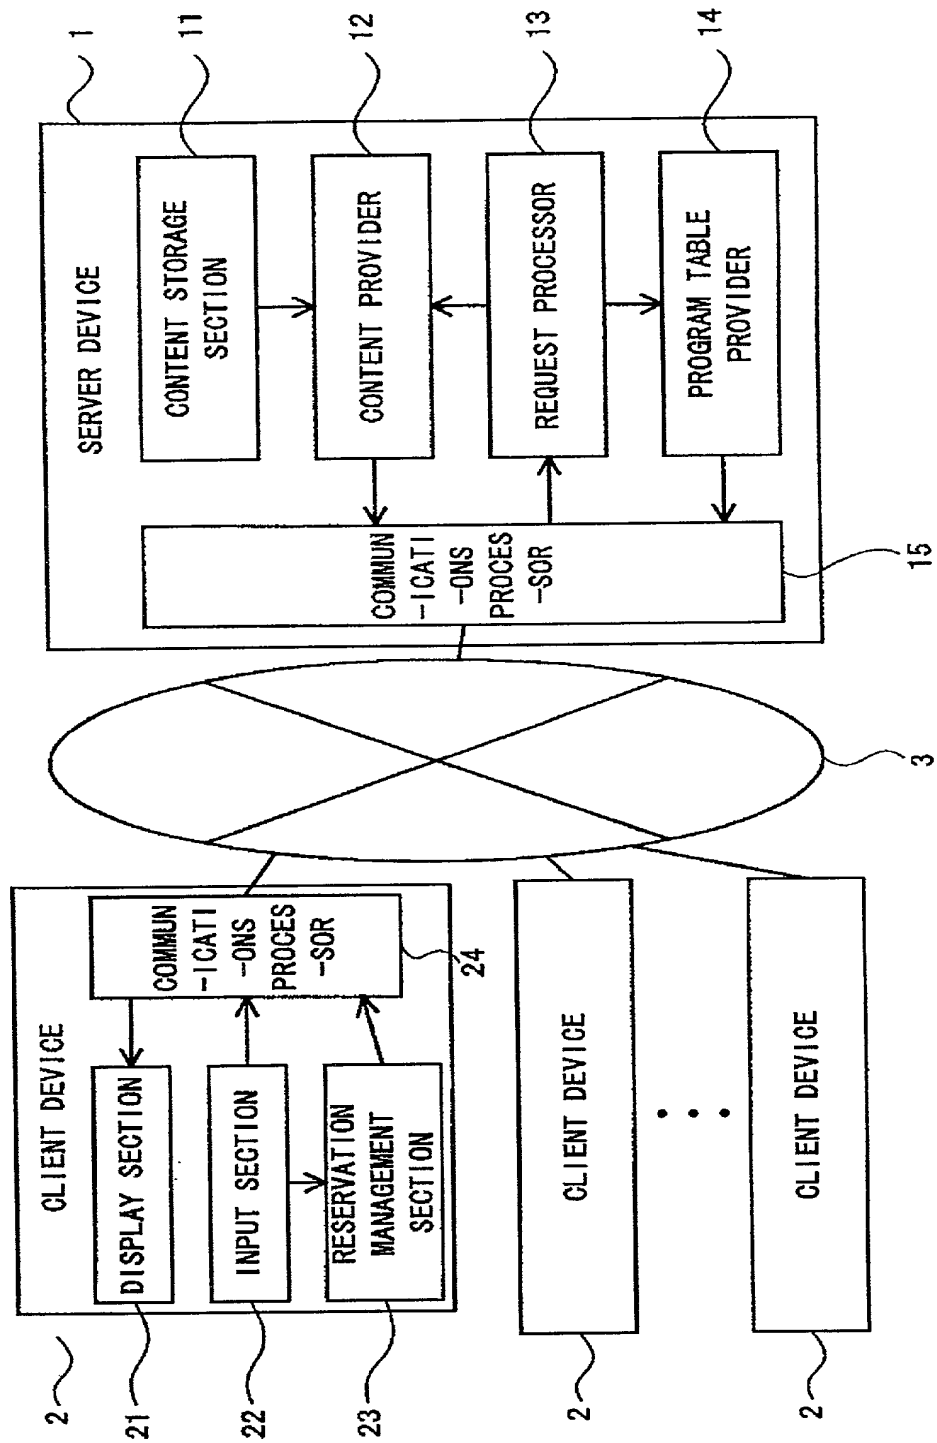

2/7

FIG. 9

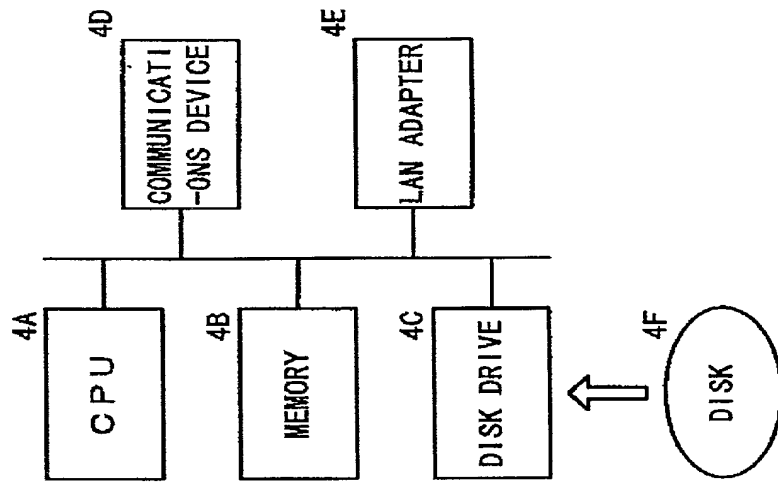


FIG. 2B


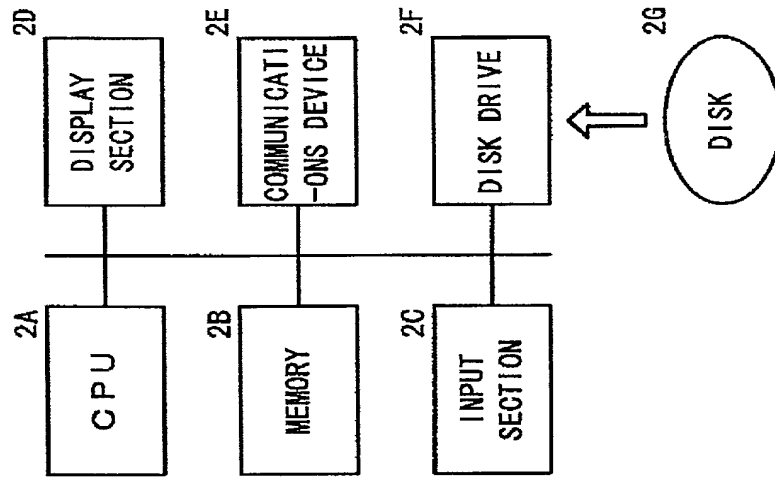


FIG. 2A

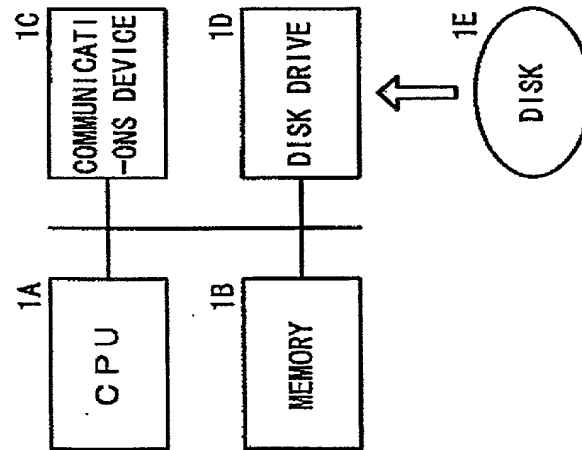

002211 61041660

FIG. 3

PROGRAM NAME	TRANSMISSION TIME	ADDRESS
A A A A A	19:00~19:30	aaaaaa
B B B B B	19:30~20:00	bbbbbb
C C C C C	20:00~21:00	cccccc
⋮	⋮	⋮

FIG. 4A

XX (MONTH)	XX (DATE)	RECEIVE	SET	CLOSE
PROGRAM NAME	TRANSMISSION TIME	REFER	UPDATE	RESERVE
<u>A A A A A</u>	19:00~19:30	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="radio"/>
<u>B B B B B</u>	19:30~20:00	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>
<u>C C C C C</u>	20:00~21:00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="radio"/>

FIG. 4B

A A A A A
> O O x x

002277 61027650

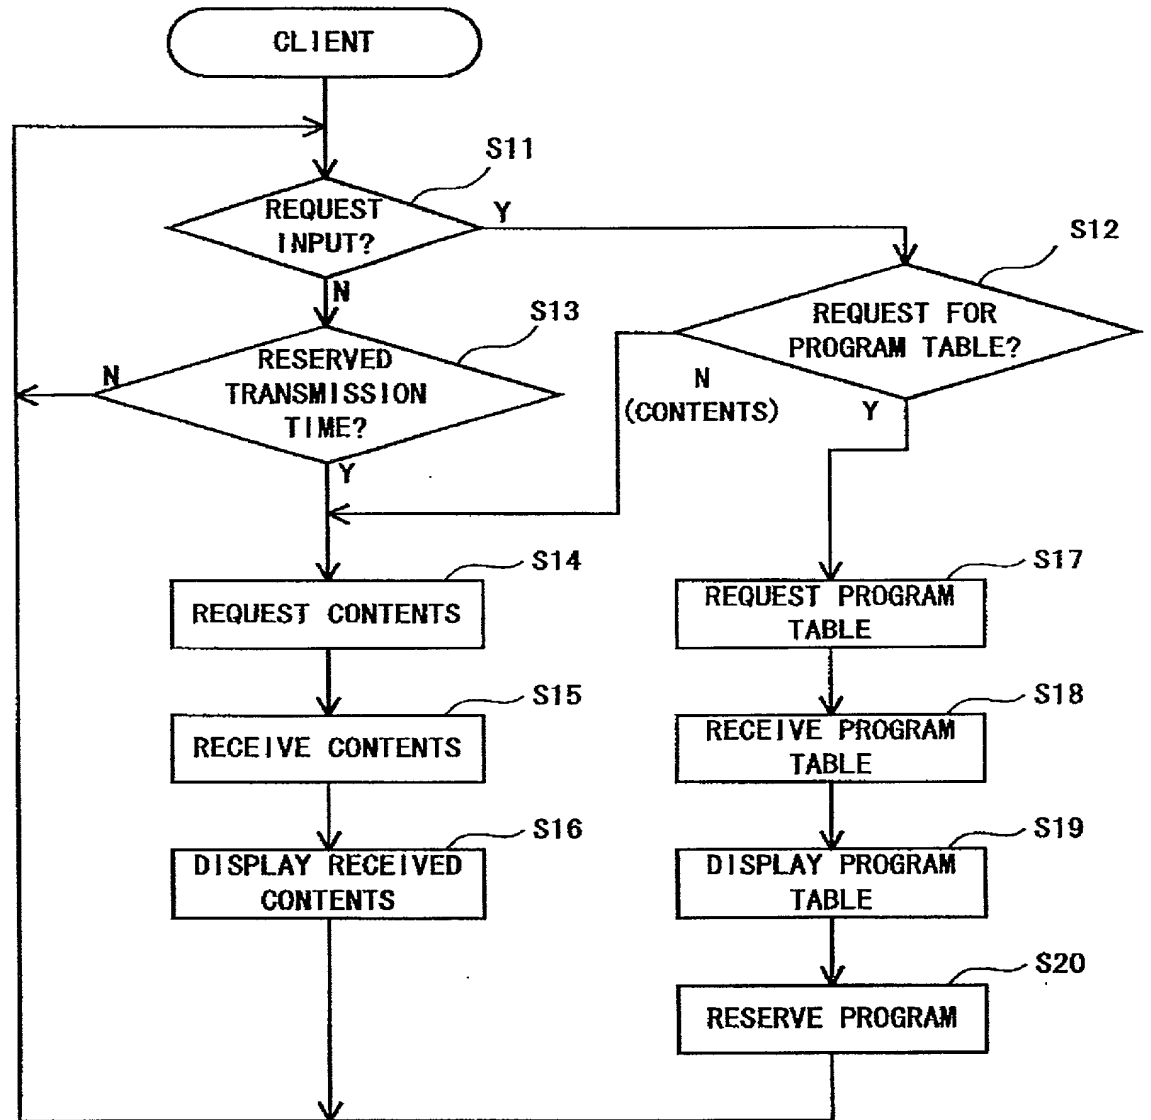


FIG. 5

5/7

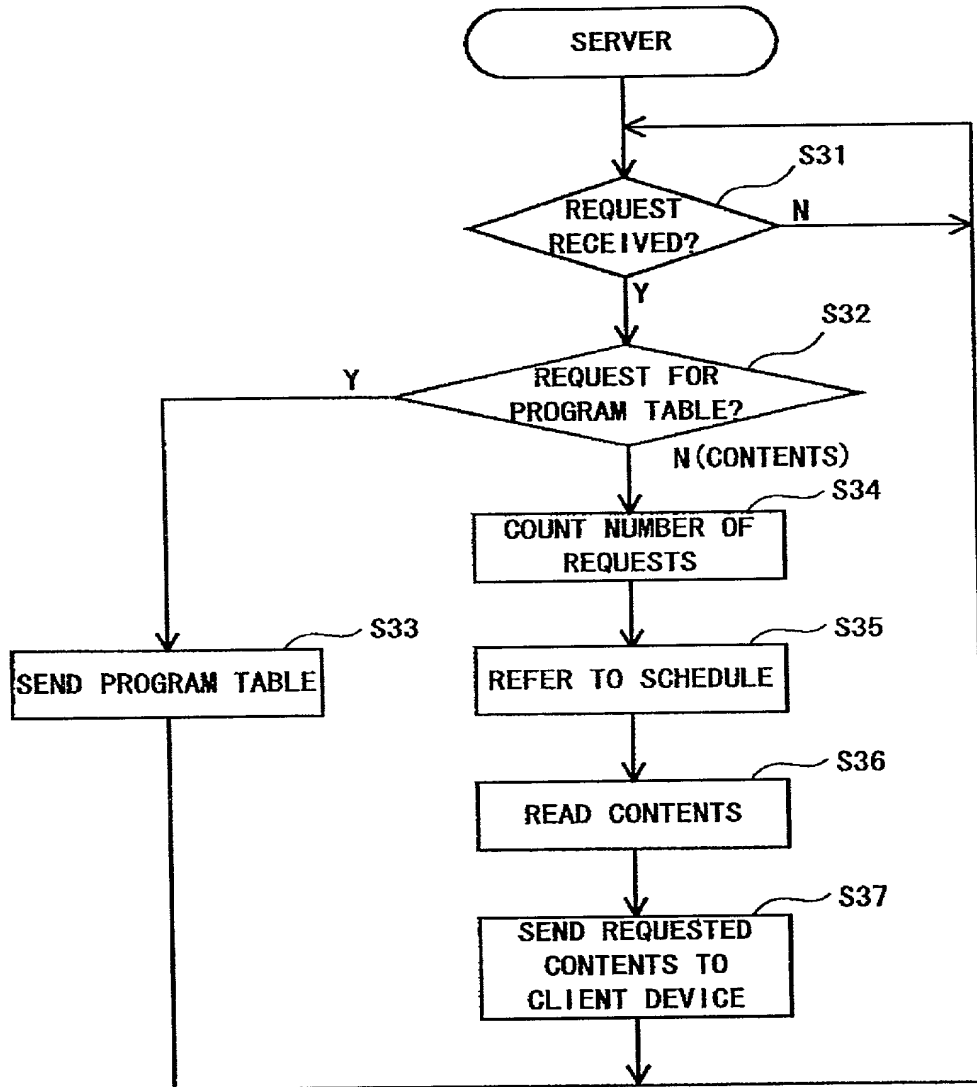


FIG. 6

002211 51021260

6/7


TIME DIFFERENCE	AREA
· · ·	· · ·
0	JAPAN, KOREA, ...
- 1	SINGAPORE, ...
· · ·	· · ·

FIG. 7

002211 610/1/60

7/7

FIG. 8

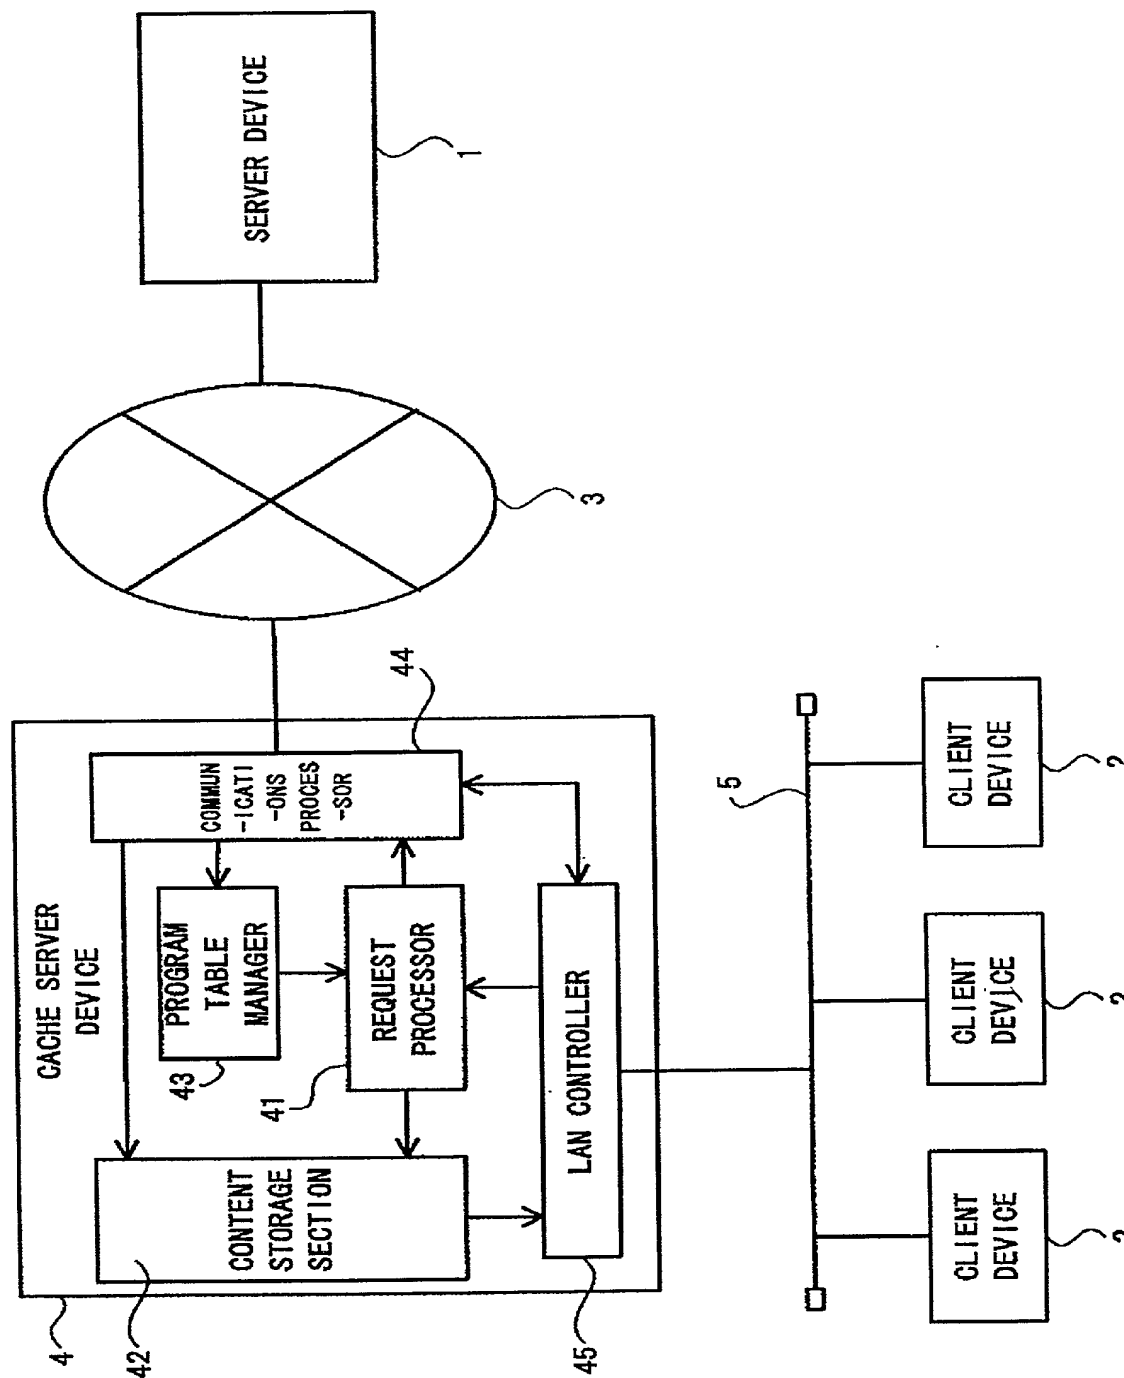

Declaration and Power of Attorney for Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

下記の名前の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名前が複数の場合）信じています。

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

INFORMATION SERVER SYSTEM

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

☐ 月 日 に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____
as United States Application Number or PCT
International Application Number _____
and was amended on _____
(if applicable)

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37部第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

Japanese Language Declaration

日本語宣言書

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一か国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している。本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior foreign application(s)
外国での先行出願

11-333534	JAPAN
(Number) (番号)	(Country) (国名)
_____	_____
(Number) (番号)	(Country) (国名)
_____	_____
(Number) (番号)	(Country) (国名)
_____	_____

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.) (出願番号)	(Filing Date) (出願日)
_____	_____

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)項に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.) (出願番号)	(Filing Date) (出願日)
_____	_____

(Application No.) (出願番号)	(Filing Date) (出願日)
_____	_____

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365 (b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed
優先権主張なし

25, 11, 1999	<input type="checkbox"/>
(Day/Month/Year Filed) (出願年月日)	

_____	<input type="checkbox"/>
(Day/Month/Year Filed) (出願年月日)	

_____	<input type="checkbox"/>
(Day/Month/Year Filed) (出願年月日)	

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Filing Date) (出願日)
_____	_____

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(e) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Status)(patented, pending, abandoned) (現況：特許許可済、保属中、放棄済)

(Status)(patented, pending, abandoned) (現況：特許許可済、保属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration

日本語宣言書

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。（弁理士、または代理人の氏名及び登録番号を明記のこと）

John H. Mion, Reg. No. 18,879; Thomas J. Macpeak, Reg. No. 19,292; Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olexy, Reg. No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit, Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William H. Mandir, Reg. No. 32,156; Brian W. Hannon, Reg. No. 32,778; Abraham J. Rosner, Reg. No. 33,276; Bruce B. Kramer, Reg. No. 33,725; Paul F. Neils, Reg. No. 33,102; Brett S. Sylvester, Reg. No. 32,765; Robert M. Masters, Reg. No. 35,603; George F. Lehnigk, Reg. No. 36,359; John T. Callahan, Reg. No. 32,607 and Steven M. Gruskin, Reg. No. 36,818.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)

書類送付先

Send Correspondence to:
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC
2100 Pennsylvania Avenue, N.W. Suite 800
Washington, D.C. 20037-3213

直接電話連絡先：（名前及び電話番号）

Direct Telephone Calls to:
(202)293-7060

唯一または第一発明者名	Full name of sole or first inventor Kazunori UKIGAWA
発明者の署名	Inventor's signature <i>Kazunori Ukigawa</i>
日付	Date October 16, 2000
住所	Residence Tokushima, JAPAN
国籍	Citizenship JAPAN
私書箱	Post Office Address c/o Justsystem Corporation Brains Park, Tokushima-shi, Tokushima 771-0189, JAPAN
第二共同発明者	Full name of second joint inventor, if any Hiroki YAMASHITA
第二共同発明者	Second inventor's signature <i>Hiroki Yamashita</i>
日付	Date October 16, 2000
住所	Residence Chiba, JAPAN
国籍	Citizenship JAPAN
私書箱	Post Office Address c/o Justsystem Corporation Brains Park, Tokushima-shi, Tokushima 771-0189, JAPAN

（第三以降の共同発明者についても同様に記載し、署名をすること）

(Supply similar information and signature for third and subsequent joint inventors.)